

Dynasylan[®] SIVO 121

The Impregnation of Wood Surfaces



Dynasylan[®]

The global brand for organofunctional silanes



Dynasylan®. More Valuable to Our Customers than a Guarantee

For more than fifty years, our silanes under the Dynasylan® brand name have been important components of paint and coating systems. Dynasylan® is now the leading global brand of functional silanes. Thanks to the company's own research and technical service worldwide, Evonik Industries AG is now in possession of a large number of exclusive patents and technologies unique anywhere in the world.

Today's products must possess a range of functionalities. For these modern systems, Evonik has developed Multifunctional Silane Systems™, which combine a variety of functions in a single product. This product range has now been expanded, the latest additions to the family being the Dynasylan® SIVO products.

Many options exist for protecting wood surfaces from water, dirt, the growth of

microorganisms, and other external influences. However, conventional wood preservatives are at best compromise solutions, with downsides as well as advantages.

Dynasylan® SIVO 121 is used for water repellent (hydrophobing) treatment as well as grease or oil repellent modification of wood surfaces. Depending on the treatment method, the treated surfaces show water repellent properties and may even prevent adhesion of oils and greases to the wood surface and their permeation into it. This in turn reduces the tendency to staining caused by adherent dirt particles carried by water or oils. The exclusion of water lengthens the life of the treated woods.

Surfaces treated with Dynasylan® SIVO 121 remain breathing active and show good weathering resistance.

Surface Protection Without Compromises: Dynasylan® SIVO 121


Evonik has succeeded in developing a particularly effective surface protection agent for wood: Dynasylan® SIVO 121. This water-based, solvent-free system has outstanding properties:

- repels dirt and water
- protects the surface from the effects of weathering, does not influence the natural change in color of wood caused by UV light
- lower sensitivity of the wood surface to the attack by microorganisms
- breathable
- almost invisible
- odorless
- protection for up to three years (depending on the concentration)
- not subject to labeling regulations under German chemicals legislation
- easy application

Dynasylan® SIVO 121 is suitable for virtually all wood surfaces. Regardless of whether the wood is untreated or already impregnated, weathered or unweathered, and originally waxed, or varnished, Dynasylan® SIVO 121 does not affect the expansion and contraction behavior of the wood and is suitable for outdoor objects without ground contact.



Technical positioning of Dynasylan® SIVO 121

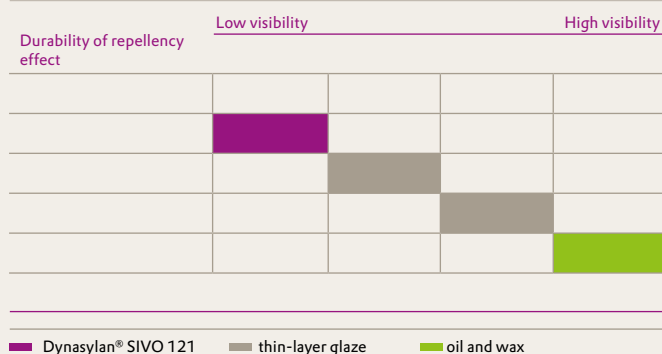

Compared with conventional systems such as oils, waxes, and thin-layer varnish, Dynasylan® SIVO 121 has considerably greater durability while leaving the appearance of the wood surface virtually unchanged. Dynasylan® SIVO 121 protects wood almost invisibly.

Dynasylan® SIVO 121 forms an almost invisible protective layer



Dynasylan® SIVO 121 on pinewood



Dynasylan® SIVO 121 on a tropical wood (meranti)

Dynasylan® SIVO 121 keeps the surface dry, reducing the growth of microorganisms





Mold infestation on spruce after one year of external weathering in a moist climate



Spruce treated with Dynasylan® SIVO 121 and exposed to the same conditions


Dynasylan® SIVO 121 produces a marked oil- and water-repellent effect

On untreated wood surfaces and those that are weathered and varnished, Dynasylan® SIVO 121 produces a strong hydrophobic and oleophobic effect.

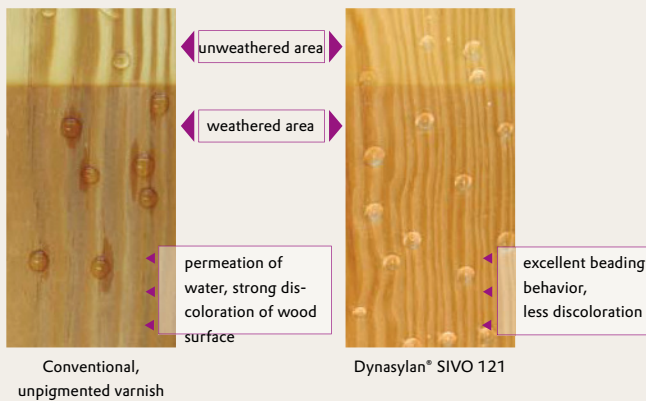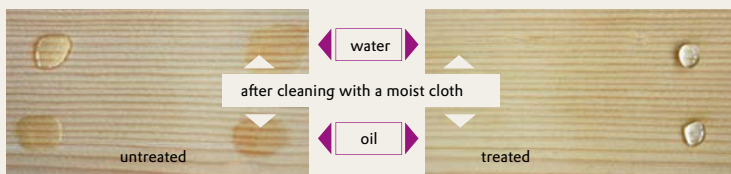


Mechanism of Action of Dynasylan® SIVO 121

The outstanding properties of Dynasylan® SIVO 121 are based on the principle of a covalent chemical reaction with the wood surface.

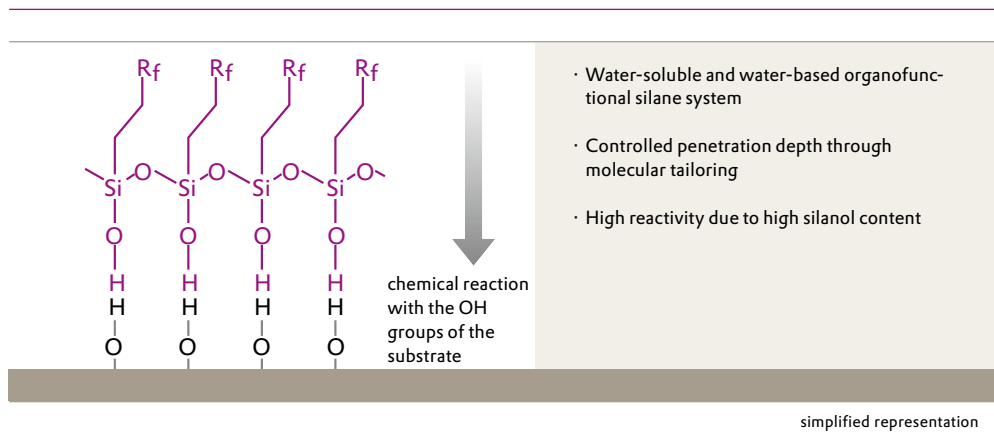


■ Substrate (wood)

The strong chemical bonding and the structure of Dynasylan® SIVO 121 result in particularly durable weather resistance.

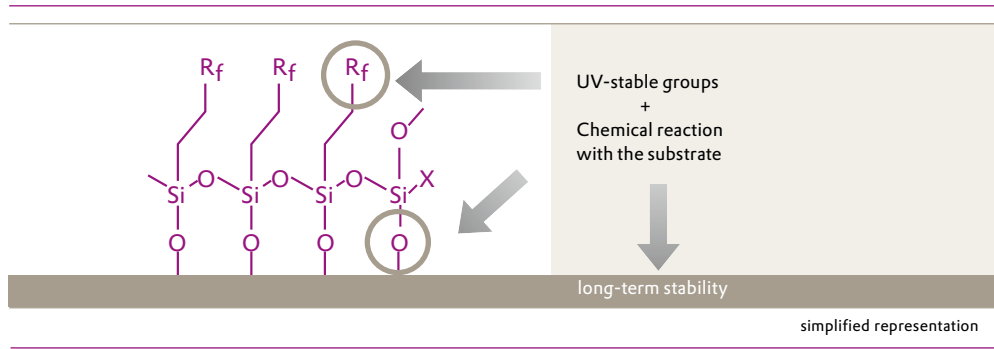

■ Substrate (wood)

With Dynasylan® SIVO 121 wood retains its permeability to water vapor

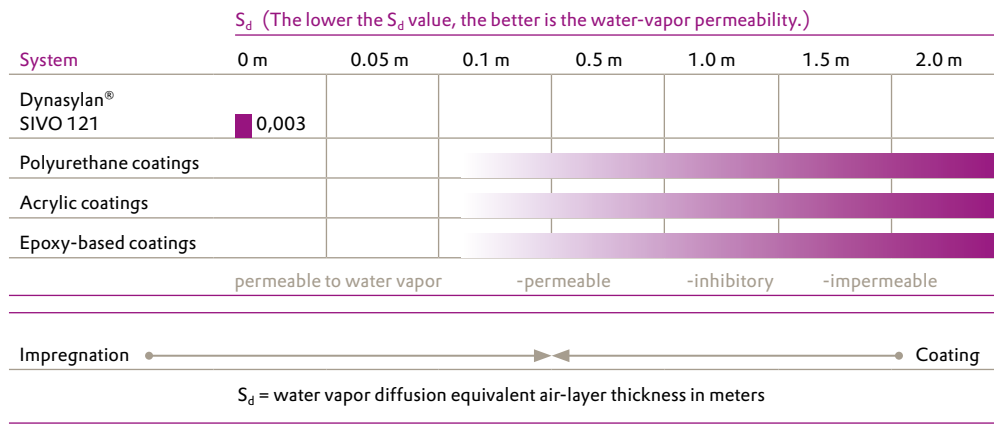

Application of Dynasylan® SIVO 121

Example of use: Garden decking



Average area of patio assumed to be approx. 20 m²
Recommended: Undiluted application for an effect lasting up to 3 years
Quantity required: 0.1 l/ m²
corresponds to 2 l Dynasylan® SIVO 121

Example of use: Garden furniture




Table: 4 m²
Chairs: 4 x 1.5 m²
Total: Approx. 10 m²
Quantity required: 0.1 l/m²
corresponds to 1 l Dynasylan® SIVO 121


Methods of applying Dynasylan® SIVO 121



rolling



painting



spraying

Dynasylan® on the Internet


Information, addresses, and contacts

The **www.dynasylan.com** website offers a well-structured platform where you can find information on products, methods, and chemical processes. A solution-finder leads the way to informative brochures and presentations for downloading, in addition to product information and safety data sheets.

A database of Evonik contacts and dealers worldwide provides important contact data, conveniently accessible at all times.

www.dynasylan.com

www.evonik.com

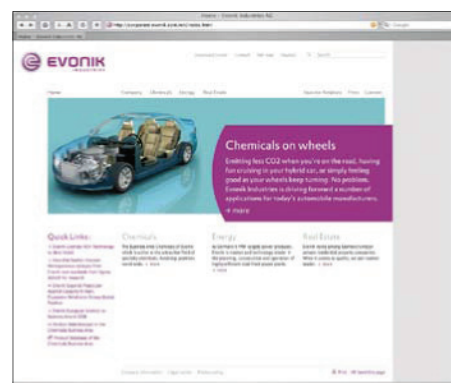

Europe / Middle-East / Africa

Evonik Degussa GmbH
Inorganic Materials
Business Line Functional Silanes
Weissfrauenstrasse 9
60287 Frankfurt am Main
Germany

Customer Service

PHONE +49 69 218 5656
FAX +49 69 218 65656
dynasytan@evonik.com

NAFTA

Evonik Degussa Corporation
Inorganic Materials
379 Interpace Parkway, P.O. Box 677
Parsippany, NJ 07054-0677
USA

Customer Service

Commercial Contact:
PHONE +1 800 237 6745 (toll free)
+1 973 541 8513
FAX +1 973 541 8503
Technical Service:
PHONE +1 732 981 5329
dynasytan@evonik.com

Latin America

Evonik Brazil Ltda.
Alameda Campinas, 579,
01404-000 São Paulo-SP,
Brazil

Customer Service

PHONE +55 11 3146 4123
MOBILE +55 11 8700 0519
FAX +55 11 3146 4148
dynasytan@evonik.com

This information and all further technical advice is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether expressed or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.

Asia / Pacific

Evonik Degussa (Shanghai) Co., Ltd.
Inorganic Materials
Business Line Functional Silanes
55, Chungdong Road
Xinzhuang Industry Park
Shanghai 201108,
P.R. China

Customer Service

PHONE +86 21 6119 1053
MOBILE +86 138 1668 7012
FAX +86 21 6119 1075
dynasytan@evonik.com

Evonik Degussa (SEA) Pte. Ltd.
Inorganic Materials
Business Line Functional Silanes
3 International Business Park
#07-18 Nordic European Centre
Singapore 609927

Customer Service

PHONE +65-6890-6803
FAX +65-6899-0090
dynasytan@evonik.com

Evonik Korea Ltd.
Inorganic Materials
Business Line Functional Silanes
94, Galsan 1-dong
Bupyeong-gu,
Incheon, 403-081

Customer Service

PHONE +82 32 510 2433
MOBILE +82 11 418 8239
FAX +82 32 505 2510
dynasytan@evonik.com

Evonik Taiwan Ltd.
Inorganic Materials
Business Line Functional Silanes
Artist Construction Bldg.
9F, No. 133
Min Sheng East Road, Sec 3
Taipei, 105 Taiwan, R.O.C.

Customer Service

PHONE +886 227 17 1242
MOBILE +886 920555 450
FAX +886 227 17 2106
dynasytan@evonik.com

Evonik Japan Co., Ltd.
12th Floor
Inorganic Materials
Business Line Functional Silanes
12th floor Monolith Building
2-3-1, Nishi-Shinjuku,
Shinjuku-ku, Tokyo 163-0912

Customer Service

PHONE +81 353 238795
MOBILE +81 90 6012 4828
FAX +81 353 23 7398
dynasytan@evonik.com

Evonik India Pvt. Ltd.
Inorganic Materials
Business Line Functional Silanes
Krislon House
Saki Vihar Road, Andheri (E)
Mumbai- 400 072

Customer Service

PHONE +91 226 7238 800
MOBILE +91 98201 59532
FAX +91 22672 38811
dynasytan@evonik.com



EVONIK
INDUSTRIES

Evonik Industries AG

Rellinghauser Straße 1–11
45128 Essen
www.evonik.com

Evonik. Power to create.